



## Analysis Duration of Potential Difference Neutralizer for Substation Grounding System

Riza Arif Pratama<sup>1</sup>, Hermawan<sup>2</sup>, Mochammad Facta<sup>2</sup>

<sup>1</sup> Aircraft Maintenance Technology, Faculty of Engineering, Tunas Pembangunan University, Surakarta, Indonesia

<sup>2</sup> Departemen of Electrical Engineering, Diponegoro University, Semarang, Indonesia

### ARTICLE INFORMATION

Received: June 07, 2022  
 Revised: November 17, 2022  
 Available online: November 30, 2022

### KEYWORDS

Grid Rod, Grounding System, Potential Difference, Simulation, Lightning Strike

### CORRESPONDENCE

Phone : +62 81231080447  
 E-mail: rizaarifp@lecture.utp.ac.id

### A B S T R A C T

The grounding system design of the 150 kV substation have resolve affect in lightning strike area. The purpose of this study is to determine the duration of the potential difference penetration that occurs due to direct or indirect lightning strikes. The parameter method grounding system uses a combination of R and L for the grid section and a combination of RLC for the rod section. Simulations due to direct lightning strikes in nearby areas greatly affect the spike in the amount of potential difference. The potential difference in the area closest to the lightning strike with a maximum surge of 57.42 V with a neutralization duration of 0.21  $\mu$ s. At the furthest distance from a lightning strike, the maximum potential difference spike is only 3.14 V with a neutralization duration of 2  $\mu$ s. The average duration of neutralization due to lightning strikes is 2  $\mu$ s. In the simulation of a direct lightning strike striking electrical equipment, it causes a very high potential difference spike in lightning strike area of 992.96 V with a spike duration of 0.012  $\mu$ s. The farthest area point at the location of the lightning strike has a spike of 31.07 V with a spike duration of 0.06  $\mu$ s. The duration of neutralization at a potential difference below 1 V, has a duration of more than 2  $\mu$ s depending on the distance from the location of lightning strike. The grounding system design is able to perform good performance with a fast potential difference neutralization duration in the event of a direct or indirect lightning strike. Lightning strikes that occur will not cause dangerous step and touch voltages for personnel in the 150 kV substation area.

### 1. INTRODUCTION

A substation is a building that contains a lot of electrical equipment that is used to support the process of the electric power system, so it really needs a grounding system to avoid damage to electrical equipment caused by lightning or short circuits.[1]. Design of the grounding system is most important to reduce the potential difference in the effect of lightning strikes. The grounding system is an effective protection system to protect the substation area due to lightning strikes. Fault currents cause a voltage gradient between equipment ground surfaces. Soil type resistance affects the magnitude of the stress gradient [2]. Electrical equipment at 150 kV substations needs to be protected from lightning strikes, because high potential differences can cause component damage. The earthing system for substations is very important for the stability of the electric power system to avoid system failures that can cause blackouts [3]. Two of the most critical parameters that influence the design of the grounding system at an electrical substation are the soil resistivity and the area available for laying the grounding system [4]. Lightning strikes in the grounding system are the effect of resistivity and ground permittivity based on frequency on the performance of the transmission line [5]. The grounding

system factor depends on the soil material and soil resistivity of the proposed site and the earthing has a hold-off value of less than 1. The potential difference caused by lightning surges or short circuit currents must be reduced to protect people and electrical equipment from damage [6]. The frequency response of the grounding system of a generator that is hit by a lightning current has a short duration to deliver a large amount of current into the grounding system of a substation so that it disappears in the ground. The electric and magnetic fields generated by these high voltages and currents can cause equipment damage and can endanger power plant personnel [7]. High soil resistance with rocky soil conditions can be grounded using vertical rods [8]. The distance between the electrodes must be at least twice the length [9]. Rods should be spread through the earthing grid and corners to ensure proper current dispersion into deeper soil layers away from the surface as possible [10]. The resistance value of the grounding electrode will be experience an increase depending on the age of the earthing installation because it is caused by a decrease in the quality of the electrode caused by corrosion [11]. Reliability and safety seen from the amount of electric current supplied to the earth must not exceed limit without damage equipment and dangerous to personnel [12].

The network impedance, which is within a satisfactory range for power frequency conditions, may not be sufficient for a safe

working environment under lightning fault conditions. Substation boundaries should be located at a safe distance from the grounding network as transients can be disastrous for small grids and high ground resistivity media due to the high ground potential rise [13]. The grounding system has a great impact in reducing system disturbances and the occurrence of lightning strikes. protection against overcurrent provides high safety for electrical equipment and people in the substation area. The simulation will measure the high peak potential caused by lightning directly or indirectly. The level of potential voltage drop will mostly enter at the earth electrode closest to the lightning strike because the ground points must be close together thereby reducing potential gradient [14]. Due to lightning strikes that can cause high potential, the grounding system must be able to provide a very fast duration for normalization again. The purpose of this study is to determine the duration of the potential difference penetration that occurs due to direct or indirect lightning strikes. Parameters that need to be used to help design a grounding system for the safety and security needed so as without damage electrical equipment and dangerous personnel in the 150 kV substation area.

**METHOD**

Parameters used in this simulation are the grid and rod in the design of the grounding system. The design of the grounding system in terms of the structure of the grounding system is assumed to use a combination of R, C and L in this simulation. Figure 1 shows, parameter grid in grounding system uses a combination of R and L for the grid section and a combination of RLC for the rod section. Figure 2 shows, grounding electrodes are characterized by a series resistance R, capacitance C, a series inductance L. This method is very simple and easy to apply to simulation calculations on ground systems with frequency response, wide frequency range, high precision and computational speed [15]. The following equations are used to determine the RL that will be used for the grid arrangement system [16], namely:

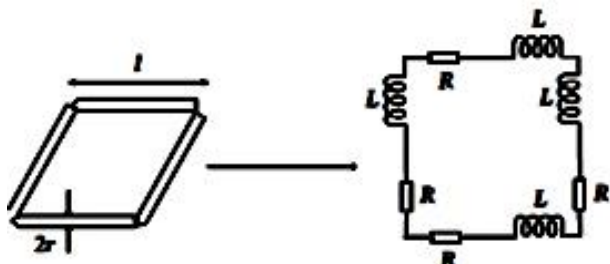


Figure 1. Grid Parameter [16]

$$R = \frac{1}{\pi r^2} \cdot \rho_{cu} \tag{1}$$

$$L = \frac{\mu_0 \cdot l}{2\pi} \left[ \ln \left( \frac{2l}{\sqrt{2rh}} \right) - 1 \right] \tag{2}$$

Where, in the calculation of R, r is the distance between the grids and  $\rho_{cu}$  the material resistance of the grid conductors. Whereas at L, l is the length of the conductor used.  $\mu_0$  has a vacuum permeability value of  $4\pi \cdot 10^{-7}$  and h is the depth of the grid. Rod parameter using RLC equation is [16]:

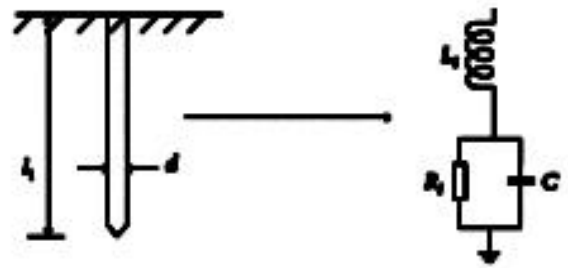


Figure 2. Rod Parameter [16]

$$Ri = \frac{\rho}{li} \left( \ln \frac{8li}{d} - 1 \right) \tag{3}$$

$$Li = 2li \left( \ln \frac{4li}{d} \cdot 10^{-7} \right) \tag{4}$$

$$C = \frac{\epsilon_r li}{8 \ln(4li/d)} \cdot 10^{-9} \tag{5}$$

Where,  $\rho$  is the resistivity of the conductor ( $\Omega$ -m),  $li$  is the total length of the rod used,  $d$  is the diameter of the rod,  $\epsilon_r$  is the permittivity of the conductor. From the results of the above equation it will be possible to design a grounding system using software and simulate direct or indirect lightning strikes based on the specified point.

**RESULT AND DISCUSSION**

Reliability analysis of grounding system design was used to find out the parameters that comply with IEEE std 80-2000 hit lightning strike. This investigation is used to analyse potential differences when subjected to a direct or indirect lightning strike. Figure 3 shows, sampling area at the time of a lightning strike is an area of electrical equipment which is an important point located at the 150 kV substation. Impulse current waves generated by lightning directly or indirectly must be able to lower the voltage level at the safest point around the substation area [17].

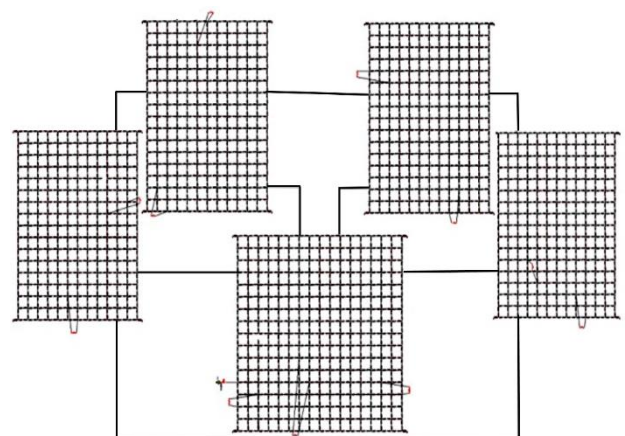


Figure 3. Grounding System Circuit Design

The simulation uses a component that acts as a lightning strike with a lightning current of 120 kA. The first simulation will optimal perform a direct lightning strike at the edge of the grounding system and the second will be carried out after passing through the arrester. Definition of optimal perform is where there

is a quality that does not exceed the technical tolerance threshold to maintain equipment in substation [18]. The duration of time on the wavefront and the duration of the stroke on the impulse voltage that affect the current that occurs in the arrester [19]. Definition of optimal perform is limited to circumstances where there is a combination of quality that does not exceed the technical tolerance threshold. Green point is location to measurement potential difference shown in Figure 4.

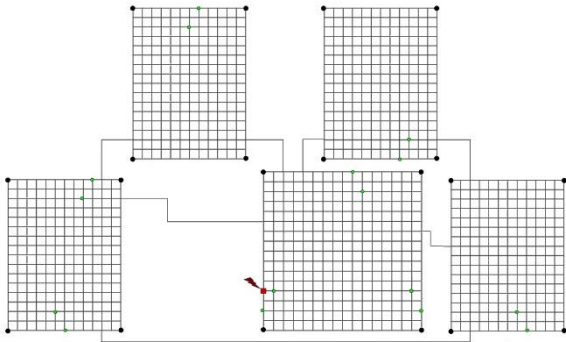


Figure 4. Sample Point Measurement Potential Difference

**Direct Lightning Strike**

A direct lightning strike is a lightning strike without passing through the arrester or a direct lightning strike that strikes the ground. In the first simulation, the location of the lightning strike was at edge of the grounding system area shown in Figure 5.

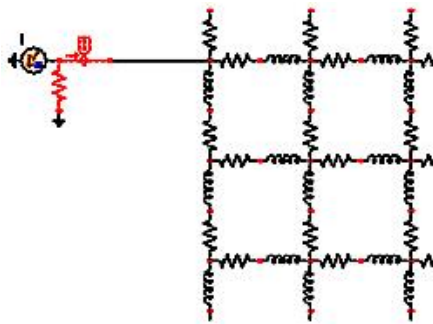


Figure 5. Direct Lightning Strike

**Sample 1**

The measures the value of the potential difference closest to the lightning strike. The location of the area to be measured can be seen in sample point measurement potential difference, where there are several samples which are reinforcement systems at the 150kV. Here are some simulation results of potential differences from several samples that have been determined based on the location closest to the electrical equipment, namely: Figure 6 shows, the highest voltage spike is 57.42V with a duration of 0.045  $\mu$ s and after reaching the maximum the voltage has the lowest decrease to -20.2 V for a duration of 0.21  $\mu$ s. The voltage increases and does not exceed 1 V for a duration of 2 $\mu$ s. The grounding system has worked optimally in reducing the voltage caused by a direct lightning strike in a few  $\mu$ s according to the simulation.

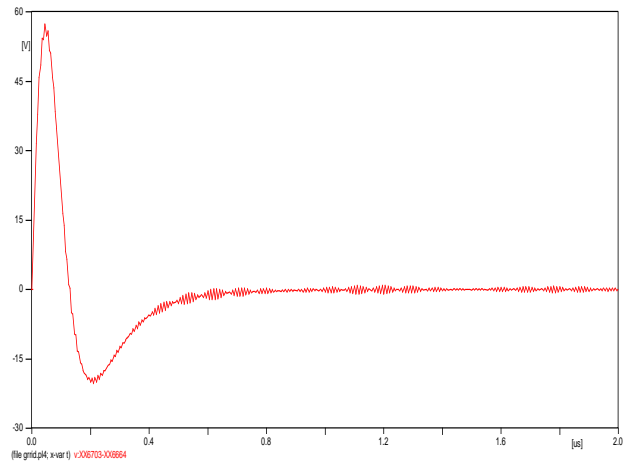


Figure 6. Duration Potential Difference Neutralizer

**Sample 2**

There was an increase in direct voltage at the initial duration of the simulation with the highest voltage of 25.49 V with a duration of 0.05  $\mu$ s and a maximum voltage drop of -9.13V for a duration of 0.205  $\mu$ s in shown Figure 7. The direct voltage increases and does not exceed 1 V for 2  $\mu$ s.

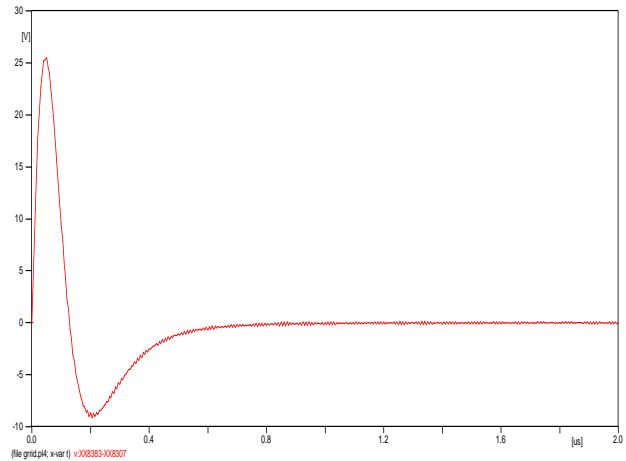


Figure.7 Duration Potential Difference Neutralizer

**Sample 3**

Figure 8 shows, explain voltage spike has decreased because the distance between the direct lightning strikes is some distance from the voltage measurement. In areas where there is a transformer at a 150 kV substation, the measurement area is smaller, the potential difference is 16.80V in a duration of 0.05  $\mu$ s and immediately drops to the lowest voltage point of -6.63V for a duration of 0.205  $\mu$ s. After that it increases but the voltage does not exceed 1 volt for a duration of 2  $\mu$ s.

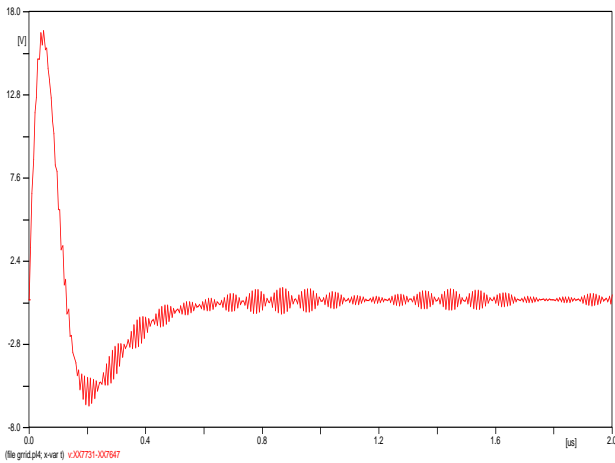


Figure.8 Duration Potential Difference Neutralizer

**Sample 4**

The effect of the current from the lightning strike reaching the grounding system in this area is smaller than in the transformer area. Figure 9 shows, peak potential difference at the initial surge was only 11.22V at a duration of 0.05 μs with the lowest voltage of -4.02V for a duration of 0.205 μs. After experiencing the lowest voltage point, the voltage increases not to exceed 1V.

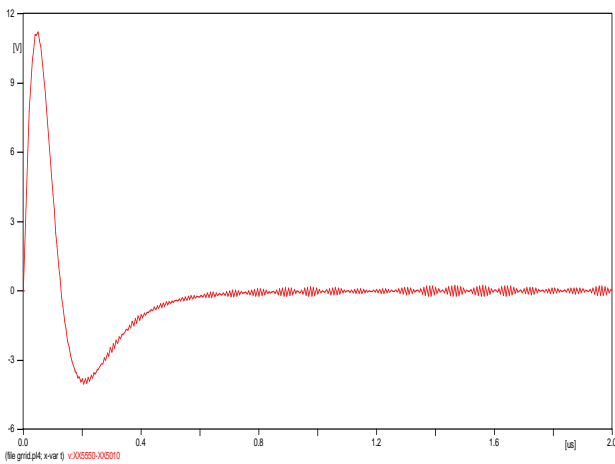


Figure.9 Duration Potential Difference Neutralizer

**Sample 5**

The effect of a lightning strike in the area with a magnitude of 9.65V at the initial surge in duration to reach a peak is 0.05 μs and after that it experiences the lowest voltage point which is -3.45 for a duration of 0.205 μs in shown Figure 10. After hitting the lowest point, it will increase to around below 1V (not exceeding).

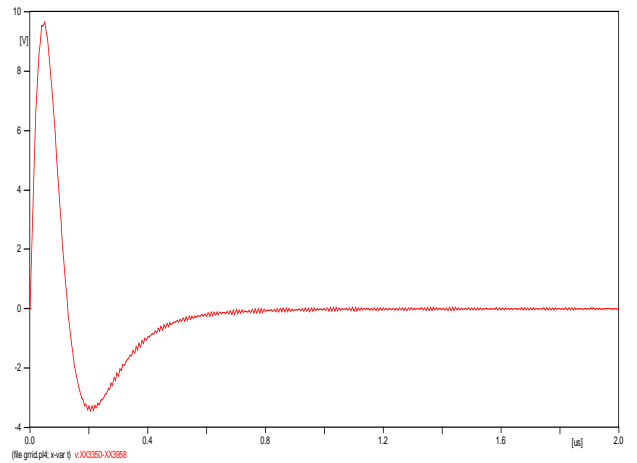


Figure.10 Duration Potential Difference Neutralizer

**Sample 6**

The distance between lightning strikes that occur in the transformer area greatly affects the initial spike during the lightning strike. Figure 11 shows, voltage obtained in the simulation only monitors the voltage to 3.14 V in a duration of 0.05μs and after reaching the peak point the voltage will drop. The decrease reaches the lowest voltage point of -1.24V and rises again until the value is below 1 V to 2 μs.

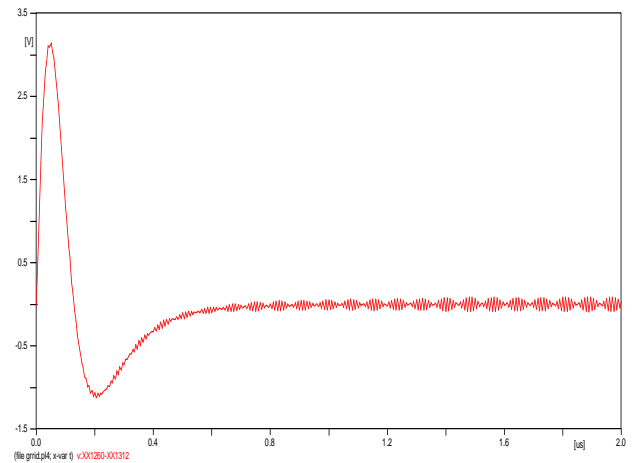


Figure.11 Duration Potential Difference Neutralizer

**Sample 7**

Figure 12 shows, maximum potential value generated is 9.56V with a duration of 0.05μs and the lowest point of the voltage is -3.4V for a duration of 0.205μs. After that, there is an increase in the potential difference not exceeding 1 V to 2 μs.

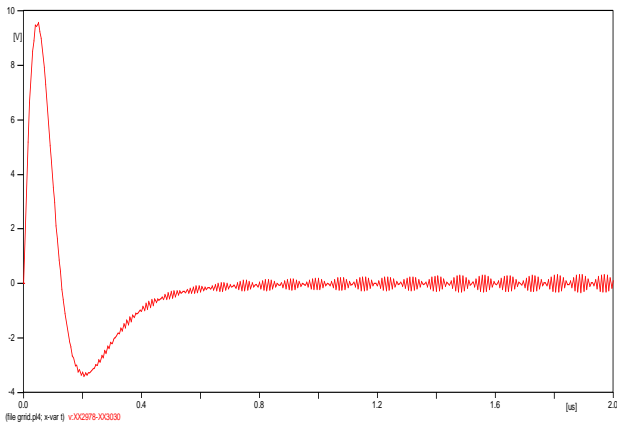


Figure.12 Duration Potential Difference Neutralizer

**Sample 8**

Figure 13 shows, measurement point was carried out in the area under the grounding system which obtained the maximum potential value of 7.11V with a duration of 0.05 $\mu$ s and the lowest voltage point of - 2.58V for a duration of 0.205. The voltage increases after reaching the lowest point but does not exceed 1 V. All samples subjected to a direct lightning strike will have a stable potential difference not exceeding 1 volt for a time span of 0.2  $\mu$ s. Figure 14 shows, overall simulation results from the interconnected grounding system have a high level of safety, because there is a stable potential difference of less than 1s at voltages below 1 V. The nearest area has faster time to peak potential difference of 0.045  $\mu$ s than the other samples. So, to reach the lowest point faster, namely 0.2  $\mu$ s. In the graph above the nearest measuring point takes longer to rise to reach normal voltage than the other samples. A lightning strike will cause a wave that will affect electrical equipment connected to a transmission line in a nearby lightning strike area, resulting in the generation of a potential difference [20].

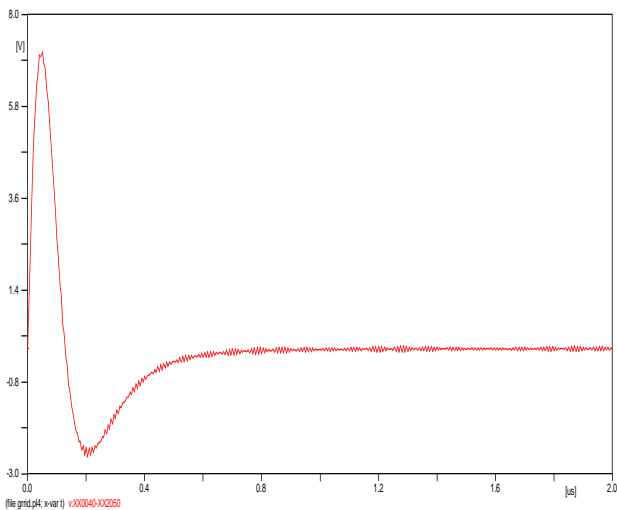


Figure.13 Duration Potential Difference Neutralizer

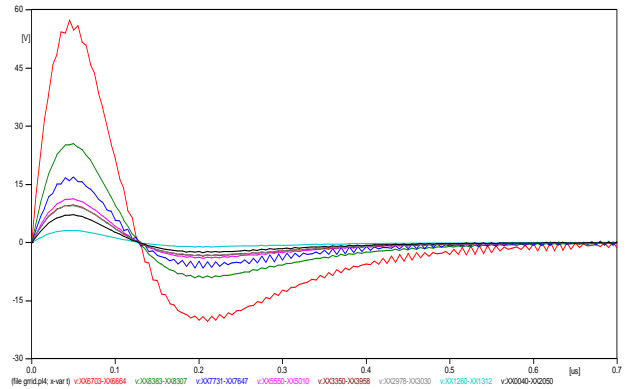


Figure 14. Total Potential Difference Direct Lightning Strike

**B. Indirect Lightning Strike**

The arrester used has a nominal working voltage of 170 kV at the 150kV substation. Indirect lightning strike simulation with parallel interconnection to the grounding system. The simulation results are obtained from several differences in the maximum potential of each point in the grounding system model. The effect of distance from the lightning strike has the effect of minimizing the lightning strike on the potential difference.

Table 1. Maximum Potential Difference

Sample	Duration Maximum Potential Difference	Maximum Potential Difference
1	0.012 $\mu$ s	992.96 V
2	0.06 $\mu$ s	230.98 V
3	0.039 $\mu$ s	490.7 V
4	0.06 $\mu$ s	107.85 V
5	0.06 $\mu$ s	92.85 V
6	0.06 $\mu$ s	31.07 V
7	0.06 $\mu$ s	95.96 V
8	0.06 $\mu$ s	69.34 V

Table 1 shows, Maximum potential difference occur in grid nearest with lighthning strike area. The fastest time to reach the highest value because the location of the measurement point is 992.96 V in nearest area lightning strike. Conductor cable parallel to the measuring point of the lightning strike area gives a high potential difference effect. Field affects the time duration to the maximum voltage Is 0.039  $\mu$ s. The closest distance to the lightning strike has more effect on the high-level maximum potential is 490,7 V. The farther the distance from the lightning strike area, the smaller the value of the maximum potential difference generated. The areas that are not parallel to the lightning strike area the values reached the maximum potential with the same duration is 0.06  $\mu$ s but the difference in the maximum potential values was different. Therefore, the closest distance to the lightning strike has more effect on a high maximum potential. The farther the distance from the lightning strike area, the smaller the maximum potential difference value. Lightning parameters affecting on the resultant overvoltage are the peak current magnitude, and the front and tail time of the current waveform [5]. Touch voltage and step voltage in the event of a short circuit caused by a lightning strike in the substation area must be able to be lowered to safe limits [21].

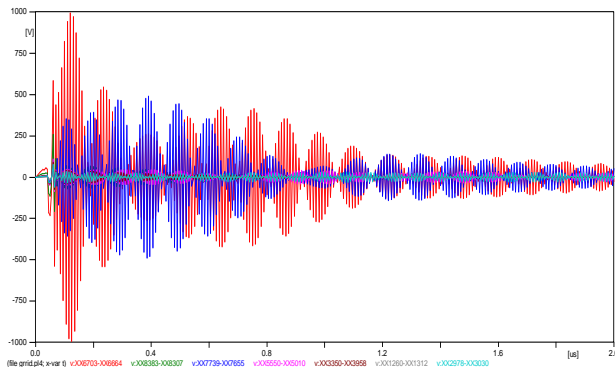


Figure 15. Potential Difference Indirect Lightning Strike

Figure 15 shows, total samples with indirect lightning strikes decreased every  $\mu\text{s}$  until the potential could be achieved and no humans or operators were working. The red graph has the highest value and farthest area has the lowest value on the potential achieved in measurements using simulation. Duration neutralization is slowly in higher potential more than  $2 \mu\text{s}$ .

## CONCLUSION

The interconnecting grounding system design works well against direct lightning strikes and indirect lightning strikes for the duration of neutralization. The average duration of potential difference penetration due to indirect lightning strikes is  $2 \mu\text{s}$ . The area that is further away has a penetration duration of approximately the same as the point closest to the lightning strike area. The duration of penetration potential difference in the nearest area is longer than that of an indirect lightning strike, is more than  $2 \mu\text{s}$ . The performance of the 150 kV substation grounding system design works well in neutralizing potential differences due to direct or indirect lightning strikes.

## ACKNOWLEDGMENT

The author is thanks to Dr. Hermawan, DEA and Dr. Mochammad Facta, Ph.D for his valuable guidance and moral support provided during this research work.

## REFERENCES

- [1] H. N. Amadi, "Design of Grounding System for A . C . Substations with critical consideraion of the Mesh, Touch and Step Potentials," *European Journal of Engineering and Technology*, vol. 5, no. 4, pp. 44–57, 2017.
- [2] R. A. Pratama, Hermawan, and M. Facta, "Analysis of Grounding System in 150 kV Kudus Substation," *2018 5th International Conference on Information Technology, Computer, and Electrical Engineering (ICITACEE)*, pp. 245–250, 2018.
- [3] D. Prasad and H. C. Sharma, "Design of Grounding System for High Voltage Substations," no. 6, pp. 61–65, 2013.
- [4] P. R. Bonda and M. K. Mishra, "Optimized Design of Earthing System for Substations with High Soil Resistivity and Limited Plot Area," in *2018 20th National Power Systems Conference (NPSC)*, 2018, pp. 1–6. doi: 10.1109/NPSC.2018.8771780.
- [5] R. Shariatinasab and J. Gholinezhad, "The effect of grounding system modeling on lightning-related studies of transmission lines," *Journal of Applied Research and Technology*, vol. 15, pp. 545–554, 2017.
- [6] S. J. Varghese, "Practical Approach on Lightning and Grounding Protection System," *International Journal of Engineering Research*, vol. 4, no. 4, pp. 192–196, 2015, doi: 10.17950/ijer/v4s4/406.
- [7] S. N. Nikolovski, Z. Baus, and G. Knežević, "Frequency and time response of power plant grounding system exposed to lightning strike," *International Journal of Electrical and Computer Engineering*, vol. 6, no. 2, pp. 512–525, 2016, doi: 10.11591/ijece.v6i2.9356.
- [8] M. Purba, P. N. Medan, A. Purba, and P. N. Medan, "the Effect of Conductive Cement As an Grounding Media of," no. April 2020, pp. 0–9, 2019.
- [9] B. S. Nasional, "Persyaratan Umum Instalasi Listrik 2000 (PUIL 2000)," *DirJen Ketenagalistrikan*, vol. 2000, no. Puil, pp. 1–133, 2000.
- [10] M. Nazih, "Safety assessment of high voltage substation earthing systems with synthetic geotextile membrane," *Journal of Mechatronics, Electrical Power, and Vehicular Technology*, vol. 10, no. 2, pp. 85–91, 2019, doi: 10.14203/j.mev.2019.v10.85-91.
- [11] Hermansyah, "Evaluasi Kehandalan Sistem Grounding Pada Instalasi Listrik Rumah Tinggal Di Kabupaten Bantaeng," *Jurnal Ilmiah d'Computare Volume 9 Edisi Juli 2019 EVALUASI*, vol. 9, p. 5, 2019.
- [12] R. Tonape, Susmita Baburao;Pujari, Komal; Vhanmare, "Research Design of Grounding System for Substation, Using Soil Enhancement Material," *International Journal of Advanced Engineering, Management and Science*, vol. 7, no. 2, pp. 49–54, 2021, doi: 10.22161/ijaems.72.6.
- [13] N. Permal, M. Osman, M. Z. A. Ab. Kadir, and A. M. Ariffin, "Review of Substation Grounding System Behavior Under High Frequency and Transient Faults in Uniform Soil," *IEEE Access*, vol. 8, pp. 142468–142482, 2020.
- [14] Z. Liu, W. Shi, and B. Zhang, "Numerical analysis of transient performance of grounding grid with lightning rod installed on multi-grounded frame," *Energies (Basel)*, vol. 14, no. 12, pp. 1–13, 2021, doi: 10.3390/en14123392.
- [15] M. Fakhraei, M. Mahmoudian, and E. M. G. Rodrigues, "Grounding system modeling and evaluation using integrated circuit based fast relaxed vector fitting approach, considering soil ionization," *Applied Sciences (Switzerland)*, vol. 10, no. 16, 2020, doi: 10.3390/app10165632.
- [16] S. G. Farkoush *et al.*, "Investigation and optimization of grounding grid based on lightning response by using ATP-EMTP and genetic algorithm," *Complexity*, 2018, doi: 10.1155/2018/8261413.
- [17] M. Adnan, Z. Abdul-Malek, N. S. M. Din, M. I. Jambak, Z. Nawawi, and M. A. B. Sidik, "Effects of lightning impulse front time on substation grounding system performance," *Indonesian Journal of Electrical Engineering and Computer Science*, vol. 20, no. 2, pp. 569–574, 2020, doi: 10.11591/ijeecs.v20.i2.pp569-574.
- [18] D. Almanda and A. I. Ramadhan, "Design Optimization of Distance Grid and Ground Rod in the Earth System," *Journal of Applied Science and Advanced Technology*, pp. 53–58, 2019.
- [19] F. Murdiya, F. Febrizal, C. Stevany, H. A. Sano, and F. Firdaus, "The effect of lightning impulse characteristics and line arrester to the lightning protection performance on

150 kV overhead lines: ATP-EMTP computational approach,” *Journal of Mechatronics, Electrical Power, and Vehicular Technology*, vol. 10, no. 2, pp. 49–59, 2019, doi: 10.14203/j.mev.2019.v10.49-59.

- [20] N. Mungkung, S. Wongcharoen, T. Tanitteerapan, C. Saejao, and D. Arunyasot, “Analysis of Lightning Surge Condition Effect on Surge Arrester in Electrical Power System by using ATP / EMTP Program,” *Proceedings of World Academy of Science, Engineering and Technology*, no. September, pp. 297–301, 2007.
- [21] Y. Cai, H. Ji, D. Wang, X. Lei, Y. Sun, and S. Yuan, “Optimal construction method and demonstration application of multi-in-one station grounding system,” *Global Energy Interconnection*, vol. 4, no. 5, pp. 520–530, 2021, doi: 10.1016/j.gloi.2021.11.005.

## AUTHOR BIOGRAPHY

**Riza Arif Pratama, S.Pd., M.T.** graduated his bachelor's program in Electrical Engineering Education Study Program from the Department of Electrical Engineering, State University of Semarang in 2015, then graduated master of electrical engineering from Departement of Electrical Engineering, Diponegoro University, Semarang in 2019. In 2020 he became a lecture at the Faculty of Engineering, Aircraft Maintenance Technology of Tunas Pembangunan University, Surakarta.

**Dr. Ir. Hermawan, DEA.** graduated his bachelor's program in Electrical Power Engineering from the Department of Electrical Engineering, Bandung Institute of Technology in 1985, then had the opportunity to continue his studies at the Ecole Centrale de Lyon, France and completed his master's (DEA) and doctoral education in 1991 and 1995. In 1986 he became a lecturer at the Department of Electrical Engineering, Faculty of Engineering, Diponegoro University, Semarang.

**Mochammad Facta, Ph.D.** earned a full bachelor's degree in Electrical Power Engineering from Universitas Hasanuddin, Indonesia, and a master's degree in Electrical Power System and Drive from Institut Teknologi 10 Nopember, Surabaya with cumlaude. He was awarded a Doctor of Philosophy (Ph.D) from Universiti Teknologi Malaysia in the field of High Voltage and Power Electronics Engineering in the year 2012. Currently, he is Associate Professor in Electrical Department, Universitas Diponegoro, Indonesia.

## NUMENCLATURE

$\rho$	resistivity of the conductor
$L_i$	total length of the rod used
$D$	diameter rod
$\epsilon_r$	permittivity
$r$	distance between grid
$\rho_{cu}$	material resistance
$\mu_0$	vacuum permeability value of $4\pi \cdot 10^{-7}$
$l$	length